



The Gentle Case Packer with SOFT-CATCH™ Technology



Intermittent-motion Case Packing









The Versatron™ Case Packer – The robust solution for gentle product handling.

The SOFT-CATCH™ Packaging Process



The product and the empty case enter the machine via customer conveyors



Overhead braking and case braking is applied to allow the previous slug of product and case to evacuate



The product moves into grid area and is detected and stopped, case moves onto lift table and is detected and stopped



The lift table raises the case up, grid fingers enter and prepare the case for product

Robust Construction

Stainless steel tubular frame

High Reliability

Designed for 24/7 operation

Simple Operation

Fast, easy changeover

Easy Walk-by Maintenance™

See-through safety guarding


Flexible and Adaptable

To future applications


Quality Fit and Finish

Optional Equipment:

- Servo Laner
- Flap Opener with Flap Scan
- Soft Placement Module
- Right Angle or Counterflow Casefeed
- 5' Infeed Extension on Packer to Accomodate Side Sweep
- Clustered or Automatic Lubrication
- Hot Melt Case Sealer or Taper



The product is dropped through the grid and into the case, where it is gently caught by the downward motion of the lift table



The packed case exits the machine via the discharge conveyor



Simple Changeover

Quick and easy by-the-numbers changeover with color-coded change parts allows for short production runs. No tools, no sweat!



Walk-by Maintenance


Lubrication and maintenance points are easy to see and access in a fast-paced production environment



Intuitive Operator Interface

Our intuitive operator interface is easy to learn and easy to use. Simple pictures guide machine operation and fault recovery

Model 939S Versatron Floor Plan

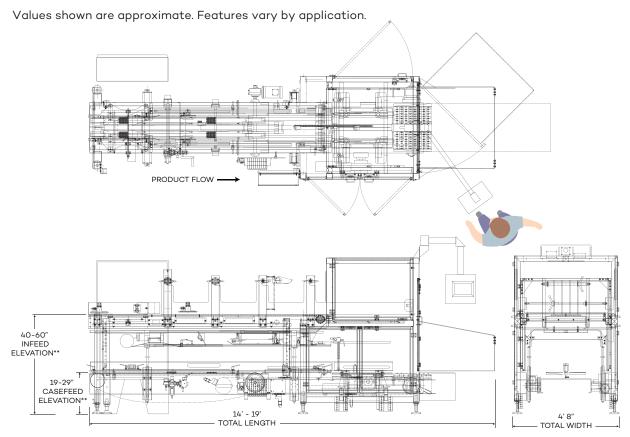

Model 939S Versatron Case Packer Standard Features*

The Standard-Knapp Versatron Case Packer features robust stainless steel construction, a servo casefeed and SOFT-CATCH™ lift table.

Model	939S Case Packer,	Controls	Allen-Bradley 24 Volt
Speed	949S Tandem Case Packer Up to 45 CPM,	Main Control Panel	NEMA 4, freestanding, adjacent to machine frame or mounted
	Tandem up to 50 CPM**	Servo Controller	Allen-Bradley
Construction	Stainless steel frame	VFD Controller	Allen-Bradley Powerflex
Infeed Interface	Butt connect	Operator Interface	Allen-Bradley Panelview with graphically-driven HMI
Product Infeed Chain	Intralox		
Product Lanes	1 - 8 lanes	Electrical Supply	460 Volt - 60 Hz-3 Phase, 60 AMP
Case Width	6" - 18" wide	Air Supply	60 PSI with 1/2" NPT
Tray Height	3" min. to full bottle height	Case Feed Flow	Inline

^{*} Standard-Knapp is committed to continuous product improvement. Specifications are subject to change without notice.

^{**} Dependent on your product application.



63 Pickering Street, Portland, CT USA (860) 342-1100 • 1-800-628-9565 info@standard-knapp.com www.standard-knapp.com • www.eol.group